

KS-M Series Mechanical Server Cabinet Lock

Cam activated swing handle



Designed for use
with standard 150
x 25 mm cutouts.

The HES KS-M installs easily on most cam-activated server cabinet doors equipped with a standard 150 x 25 mm lock prep and provides support for a 6 or 7-pin SFIC (Small Format Interchangeable Core) mechanical key override.

Features

- Cam activated
- Non-handed
- Mechanical 6 or 7-pin SFIC key override (sold separately)
- Black finish
- SecuriCare three-year, no-fault, no questions asked warranty

Accessories

- **SFIC-BC** KS Series SFIC blank, black plastic core
- **SFIC-K1** KS Series K1 Keyway, Keyed Alike
- **SFIC-K2** KS Series K2 Keyway Keyed Alike
- **KS-CAM38** KS Series 38mm-1 Locking Cam
- **KS-CAM45** KS Series 45mm-5 Locking Cam

Specifications

Holding Force

- Static Strength 350 lbs

Environmental

- Operating Temperature -13° to 131°F [-25° to 55°C]
- Indoor Use Only



3
Year
SecuriCare
Warranty





Swinging
Door

hes.

ASSA ABLOY

KS-M Series Mechanical Server Cabinet Lock

Dimensions

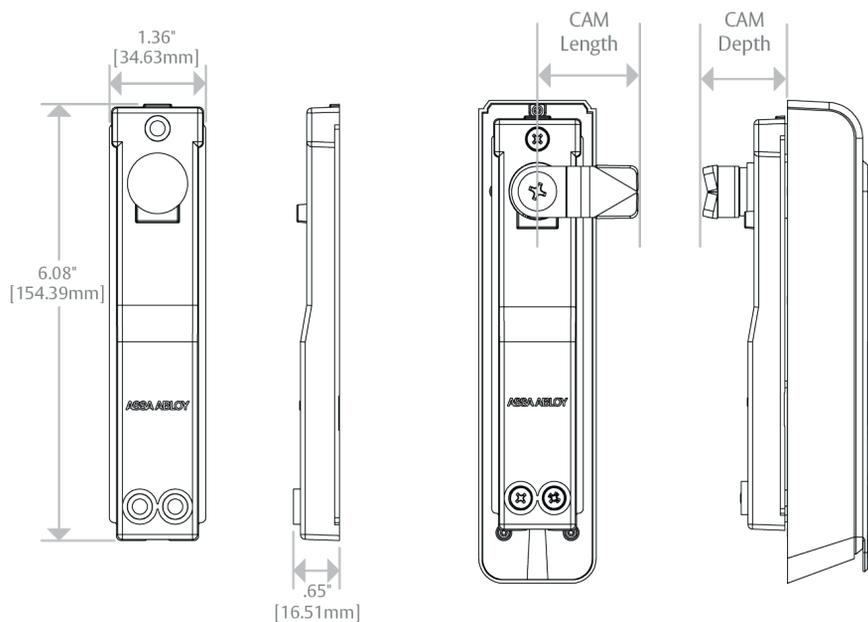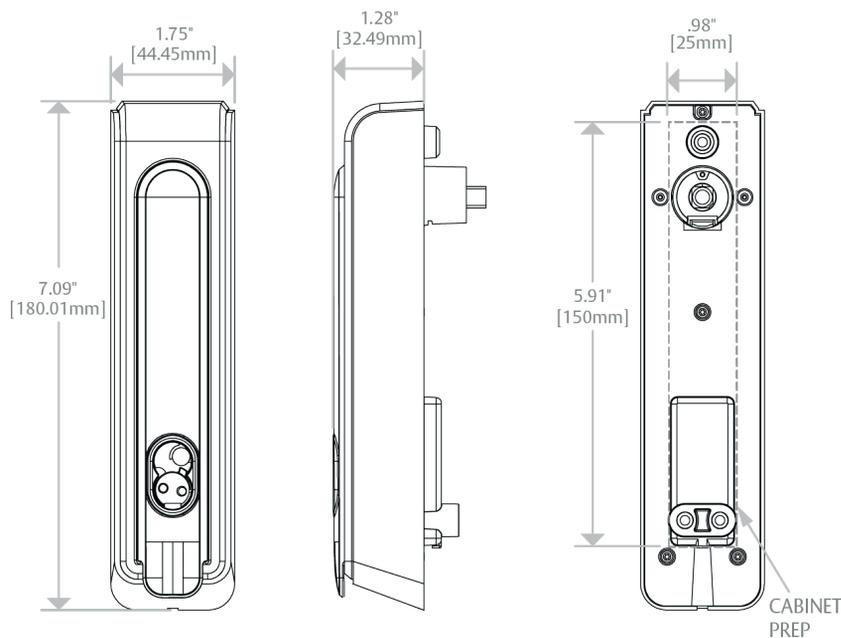

How to Order

PRODUCT NO.	COLOR	OPTIONS
KS-M	-B	
KS-M	B Black	(blank) No SFIC or Blank Plastic Core (Standard)
		K1 MEDECO X4 SFIC Cylinder & 2 Keys