

KS-EM Electromechanical Server Cabinet Lock

(Compatible with KS210-D models)

Cam activated swing handle



Designed for use with standard 150 x 25 mm cutouts.

Designed for use with standard 150 x 25 mm cutouts, the KS-EM Server Cabinet Locks come standard with lock monitoring and utilizes an SFIC (Small Format Interchangeable Core) mechanical key override. An additional optional extended DPS monitoring sensor can be connected to ensure that the cabinet is closed, locked and secure.

The KS-EM provides a flexible, scalable cabinet control solution for a bank of cabinets being managed using a single point of access.

The KS-EM also pairs well with KS210-D OSDP Access Control server cabinet to secure both the front and back of the cabinet. Providing monitoring and control of cabinet with as few as 4-wires.

Features

- Hard wired electromechanical
- 2 - Wire operation
- LEDs indicate valid/invalid entries; Red Amber or Green Amber
- Integrated Tamper, Cam Rotation & Locked State Monitoring with (Optional) External Door Position Status
- Cam activated
- Non-handed
- Mechanical 6 or 7-pin SFIC key override (Includes compatibility with MEDECO XT Intelligent Keys)
- Black finish
- SecuriCare three-year, no-fault, no questions asked warranty

Accessories

- **KS-DPS** KS Series Surface Mounted Door Position Switch
- **SFIC-BC** KS Series SFIC blank, black plastic core
- **SFIC-K1** KS Series K1 Keyway, Keyed Alike
- **SFIC-K2** KS Series K2 Keyway, Keyed Alike
- **CBL-QCKS-D** KS210-D and KS-EM interface cables
- **KS-CAM38** KS Series 38mm-1 Locking Cam
- **KS-CAM45** KS Series 45mm-5 Locking Cam

Certifications

- FCC Part 15 Compliant
- IC Compliant
- RoHS Compliant

Specifications

Electrical

- Dual voltage 12/24 VDC
- 130 mA at 12 or 24 VDC (peak)

Holding Force

- Static Strength 350 lbs


Environmental

- Operating Temperature: 32° to 122°F [0° to 50°C]
- Indoor Use Only



KS-EM Electromechanical Server Cabinet Lock

Dimensions

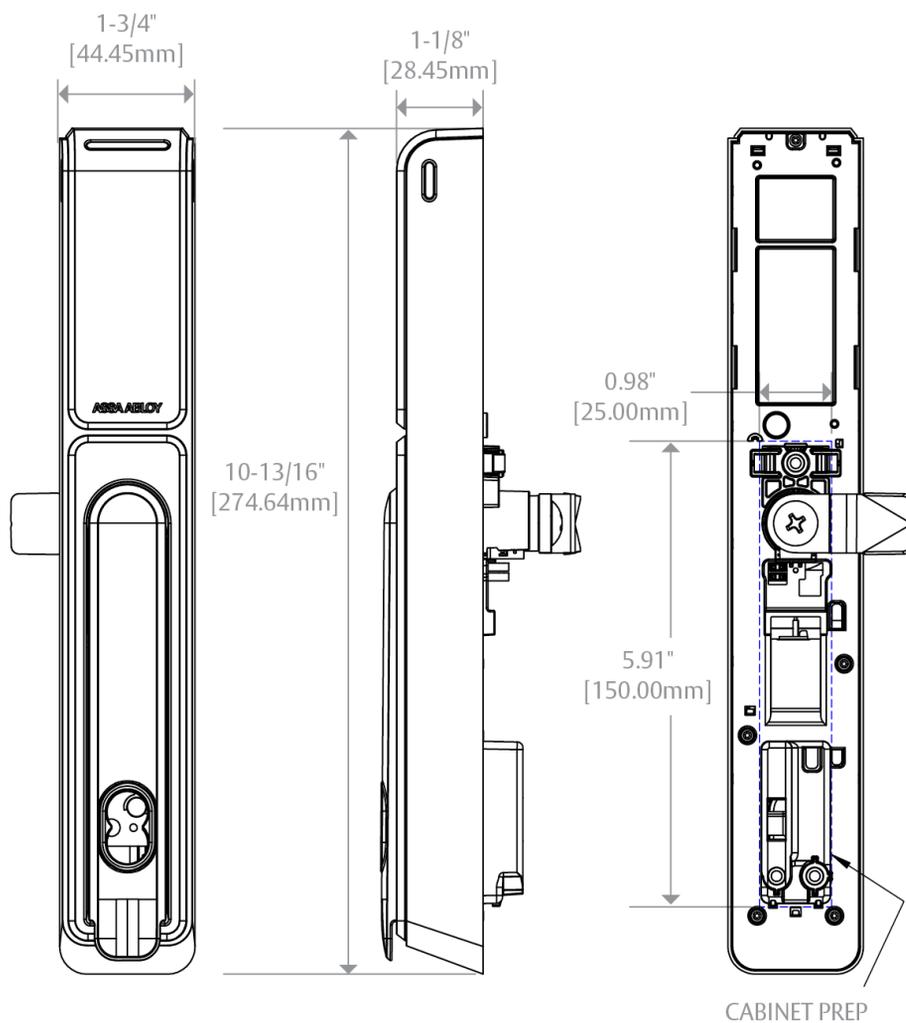

How to Order

SERIES	COLOR	OPTIONS
KS-EM	-B	-BC
KS-EM	Black	(blank) No SFIC or Blank Plastic Core (standard) BC SFIC Blank (Black Plastic Core) K1 MEDECO X4 SFIC Cylinder & 2 Keys