

# BITSTREAM™

power • data • single-point fire interface


**Lifetime Warranty**
**Electrical Specifications**

Power Supply Board	BTS500-8R
Input	100-240VAC
Total Max Output	500W
Max Output Per Port	90W
Number of PoE Ports	8
Network Speed	10/100/1000
Fire Alarm Disconnect**	Yes
Battery Backup	Yes
Battery Type	SLA
System BTU/Hr	220
Full Load Efficiency	88%
Operating Temperature	0-49C

\*\* Note: BTS Single Point Fire Interface function pairs with BX50 splitter

**BTS Series Key Benefits**

<b>Fire Alarm Disconnect</b> - Single Point Fire Interface (with BX50)
<b>Central Battery Backup</b> - Provides backup to all connected devices
<b>Built-In Charger</b> - Supports 48V SLA battery sets
<b>Network Monitored PoE</b> - Port status/reset, battery status, email alerts
<b>100-240VAC Universal AC Input</b> - Works in 208VAC datacenters
<b>High Power 802.3bt Compatible</b> - Up to 90W per port, 500W total
<b>Enhanced Cybersecurity</b> - Provides strong cybersecurity protection

**Ordering**

Model No.	Description	Size
BTS500-8R	Rackmount PoE Switch, 500W, 8 Ports	1.7H x 19W x 15.5D


**Overview**

The BITSTREAM BTS unmanaged PoE switch supports up to eight PoE network devices. Two SFP fiber ports allow high data speeds over long connections. The BTS500 provides 500 watts total power with up to 90 watts per port (802.3bt compliant) and feature a universal AC input (100-240VAC) for global deployment. Network monitoring for the PoE outputs provides voltage, current, and power measurements, battery and fault status, and allows PoE power cycling remotely for each network port.

Proprietary Single Point Fire Alarm Interface (SFI) provides fire alarm disconnect to multiple BX50 PoE power supply splitters with a single fire alarm connection at the switch. Integrated 48V SLA battery charger provides economic backup to all connected PoE devices on an AC failure.

**Family Specifications**
**Input:**

- 100-240VAC Universal AC Input, 50/60Hz

**Outputs:**

- 500W total output
- 90W maximum per port (802.3bt)
- 8 outputs, managed PoE

**Battery Backup:**

- Built-in battery charger for central backup
- Charges 48V Sealed Lead Acid (SLA) battery sets
- Auto switchover to battery with zero transfer time

**Remote Monitoring & Control:**

- Email or SNMP alerts on faults
- Remote port disable / reset
- Battery status and alerts
- Battery voltage
- 1000 event history log
- Monitor voltage / current / power per output

**Fire Alarm Disconnect (compatible with BX50):**

- Single-Point Fire Interface (SFI) reduces & simplifies wiring
- DC voltage: 9 to 28VDC, 3 to 15mA
- Dry contact NO/NC
- Optional Fire Alarm latching

**LED visual indicators:**

- Port status (Green - Ethernet, Yellow - PoE)
- Front panel LED current displays

**Agency Approvals:**

- UL294, ROHS Leadfree / CE

# BTS Series PoE Switch

8 Port / FAI / 500W

## BTS SERIES FEATURES

**Built-in 48V SLA Battery Charger** Integrated battery charger provides dedicated backup for all connected PoE devices, reducing load on system UPS. Battery monitoring provides battery voltage and connection status remotely.

**500W Total Output** High total power output (maximum 90W per port - 802.3bt compatible).

**Port Status Indication** Dual color port LEDs indicate normal or fault conditions per zone. Green/Normal or Yellow/Fault

**Universal AC Input** Accepts 100 to 240VAC input for datacenter operation.

**Network Monitored PoE** View PoE output port voltage, current, power, and status locally or remotely. Disable or perform a timed reset of any or all ports.

**Strong Cybersecurity Protection** Configurable port settings, certificate selection, complex password settings, and other cybersecurity settings provide strong protection against cyber attack.


**User Control** Multiple user access levels with user activity log to track configuration changes and actions by user.

**MSM Enterprise Compatible** Monitor status of all LSP network connected devices and perform batch firmware updates through MSM Enterprise monitoring software.

## BITSTREAM - SINGLE-POINT FIRE INTERFACE

**SFI** When paired with a BX50 PoE splitter, the BTS can drop lock power on a fire alarm condition from a single fire alarm disconnect at the BTS. This eliminates the need to pull wiring for an FAI connection to each door, saving cost and simplifying installation.

### BX50 Proprietary Single-point Fire Interface™

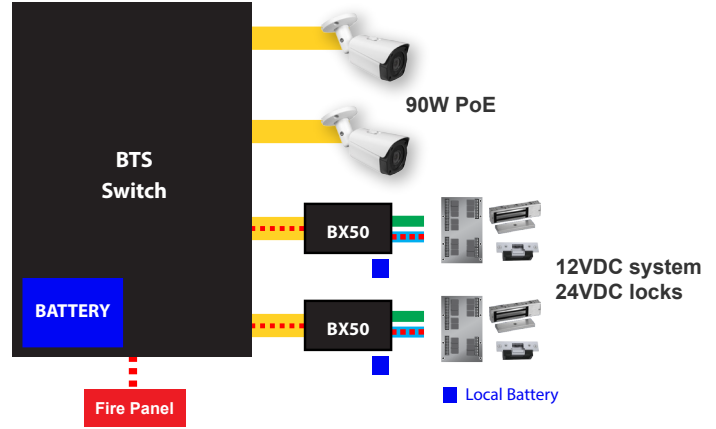

## BTS - MANAGED DASHBOARD

Port	Ext. Control	Priority	Channel	Device	Enabled	FAI State	Voltage	Current	Power	Class	Status
1	1	0	Channel A		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
			Channel B		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
2	2	0	Channel A		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
			Channel B		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
3	3	0	Channel A		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
			Channel B		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
4	4	0	Channel A		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
			Channel B		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
5	5	0	Channel A		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
			Channel B		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
6	6	0	Channel A		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
			Channel B		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
7	7	0	Channel A		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
			Channel B		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
8	8	0	Channel A		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled
			Channel B		No	N/A	0.00V	0.00A	0.00W	N/A	Disabled


## BITSTREAM FAMILY




BTS500-8R



BT500-8R / BT500-16R



BX50



BX75

## BX SERIES - POE SPLITTERS

**BX50** Provides up to 50W at 12 and 24VDC from BT or BTS for EDGE applications requiring fire alarm disconnect. Compatible with BT & BTS Single Point Fire Interface mode.

**BX75** Provides up to 75W at 12 and 24VDC from BT, BTS, or any 90W PoE source. With local fire alarm disconnect.

See the BX Family datasheet for more information.

LifeSafety Power LLC  
10027 S. 51st Street, Suite 102  
Phoenix, AZ 85044 USA  
[www.lifesafetypower.com](http://www.lifesafetypower.com)  
Phone (888) 577-2898  
info1@lifesafetypower.com

### IMPORTANT

All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. LifeSafety Power makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. LifeSafety Power's only obligations are those in the LifeSafety Power Standard Terms and Conditions of Sale for this product, and in no case will LifeSafety Power or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, LifeSafety Power reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.