



## Overview

MCLASS™ Unified Power Systems combine FlexPower® power modules alongside Mercury Security™ access hardware in one compact and secure UL Listed solution.

This unit is a 12V or 24V DC single voltage network managed access power system.

One M8 managed control module provides eight access control inputs capable of voltage or dry contact activation and eight outputs programmable for failsafe / failsecure operation at either 12 or 24 VDC and controlled by the integrated fire alarm interface circuit on the FPO.


MCLASS enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch.

## System Features

- ◆ **FPO offline power supply**
  - 120 or 230 VAC input
  - 12 and 24 VDC outputs
  - On board Fire Alarm Interface
  - Continuous and resettable DC
- ◆ **Distributed output module**
  - Eight managed - fused at 3A each
- ◆ **Remote Monitoring & Control**
  - Live voltage / current reporting
  - Remote battery load testing
  - Output power cycling and abnormal operation alert
  - System / AC fault reporting
  - Email and SNMP trap notification
- ◆ **Lifetime Warranty**

## Enclosure Features

- ◆ **Labor saving design**
  - Pre-wired power section
  - Pre-punched knockouts
  - Removeable backplate simplifies installs
  - Pre-defined hole pattern for power section
  - Access panels mount on threaded standoffs - no drilling required
- ◆ **Additional benefits**
  - Wire management room
  - 6.5" enclosure depth fits battery set
  - Tamper switch, lock, dual key set standard
  - Mounting hardware for access boards included

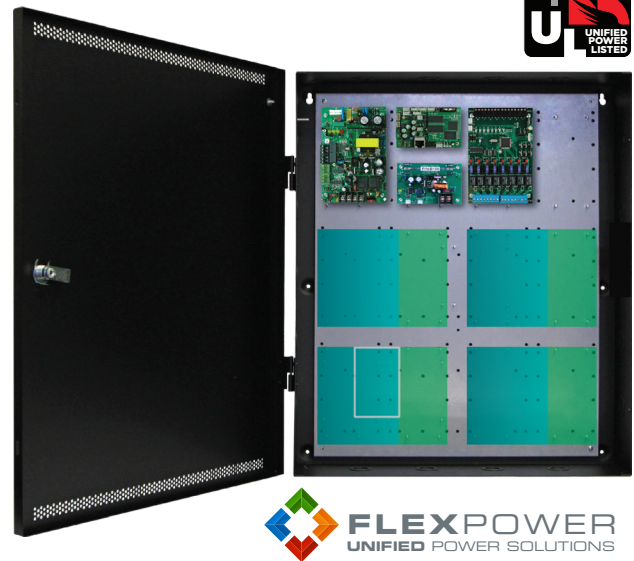

Ordering	Description
FP075-B100M8NL4E4M	75W (12V & 24V) 8 managed outputs, MCLASS system



## Specifications

<b>Input Power</b>	Input 120/230 VAC 50/60 Hz   83 Watts (0.70A) Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
<b>Output Power</b>	4A@12V and 2A@24V DC, 75W maximum combined output power Outputs: Continuous (DC1) Resettable (DC2) 8 managed outputs, fused at 3A each 120 mV output voltage ripple System Efficiency: 83%   System BTU Rating: 33 BTU/Hr
<b>Battery Charging</b>	Independent built-in 1A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
<b>Supervision</b>	AC Fail (form "C" contacts) System fail (form "C" contacts) may be triggered by low/no battery, short to earth ground and power supply failure
<b>Visual Indicators</b>	AC input, DC1 and DC2 output System fault AC fault Short to earth ground Reverse battery polarity Fire Alarm Input activated B100: DC input / output and Fault M8: DC input / output and Fault
<b>Regulatory Compliance</b> <b>Mercury/LSP</b> <b>Joint Listing</b>	UL294, UL603, UL1076, ULC S318, ULC S319 CSA C22.2 #107.1, CSA 22.2 #60950 CSFM / FCC Part 15, Subpart B CE
<b>Enclosure Dimensions</b>	Size: 24.00H x 20.00W x 6.50D in. (61.00 x 51.00 x 16.50 cm)   Weight: 25 lbs.
<b>Access Panel Mounting</b>	LP1501, LP1502, LP4502, LP1500, MR50, MR51e, MR52, MR16, LNL-500, 1100, 1200, 1300, 1320, 2000, 2210, 2220, 3300


**Universal Mercury Mounting Pattern**

**E4M**


Mercury	Slots w/Power	Slots all Mercury
MR52 / LPxx	4	6
MR16in / MR16out	4	6
LP2500 / MUX8	4	6
LP1501 / MR51e	8	12
MR50	8	12

**E4M1 (adds six MR door panels)**

Mercury	Slots w/Power	Slots all Mercury
MR52 / LPxx	10	12
MR16in / MR16out	10	12
LP2500 / MUX8	4	6
LP1501 / MR51e	8	12
MR50	8	12

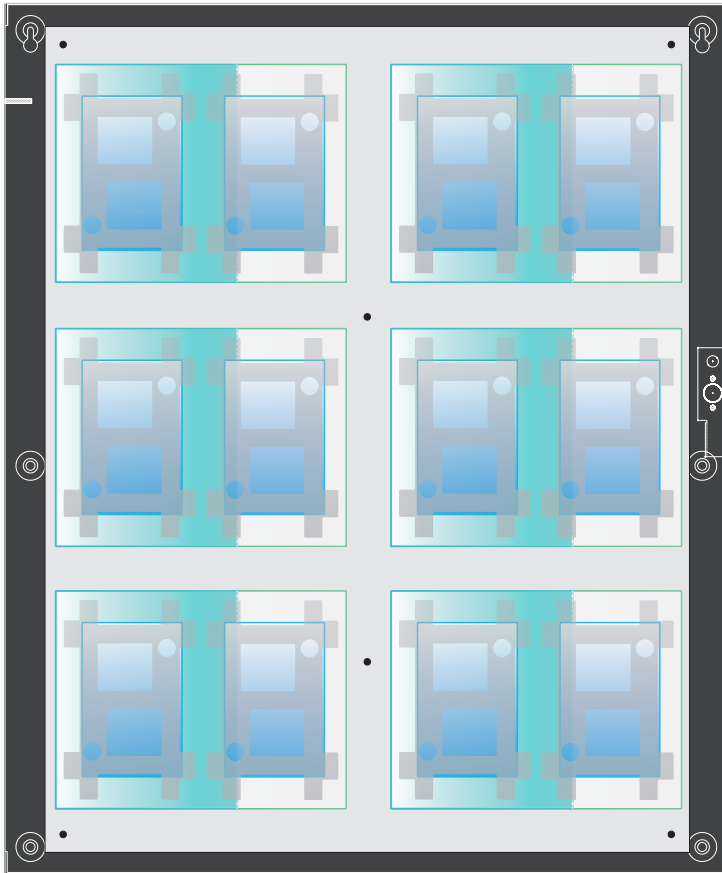


**UNIVERSAL MERCURY PATTERN**  
all boards each slot




- (1) MR52 / LP1502
- (1) LP2500
- (2) LP1501 / Mr51E
- (2) MR50


**E4M1 EXPANDS SIX MR52 TO DOOR**



**E4M2 ON DOOR ONLY**



**E4M2 TWO VERTICAL**



**lifesafetypower.com**

(888) 577-2898  
info@lifesafetypower.com

Specifications subject to change without notice.

© 2022 LifeSafety Power. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power. This literature is for guidance only. It does not constitute recommendations, representation, or advice, nor is it part of any contract. Our policy is one of continuous product improvement, and the right is reserved to modify the specifications contained herein without notice.

P01-797A 07/22

**LifeSafety Power**  
10027 S. 51st Street, Suite 102  
Phoenix, AZ 85044 USA  
PH 888-577-2898  
info@lifesafetypower.com