


VANTAGE™

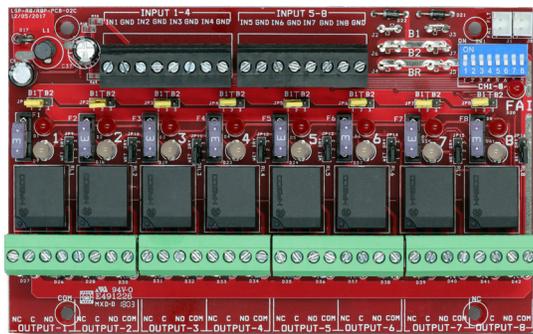

OVERVIEW

The Vantage family R8 lock controller modules add eight (8) lock control outputs to a Vantage power supply and are typically supplied as part of a system or purchased as an expansion piece to an existing system.

The R8 module provides 8 access control inputs capable of NO dry contact or open collector activation and 8 relay outputs, programmable for dry contact or powered for failsafe or failsecure locking devices.

Each lock output is individually selectable for either of the two voltages available in a Vantage dual voltage system. OUTSMART™ dual color LEDs visually indicate voltage levels by output (Green for 12V, Blue for 24V). An additional visual indicator (red LED) shows status of the output to be active or inactive.

- Multiple outputs for direct lock control and additional accessory power distribution
- Configurable for fail-safe, fail-secure, and dry contact operation modes
- Fire Alarm Interface (FAI) and fault detection and reporting to the Vantage series power supply
- OutSmart™ Bi Color LED voltage indicators
- Lifetime Warranty

VISUAL / MECHANICAL

Visual indicators:

- Relay activation per output - Red LED
- Voltage Level - Bi Color Blue/Green LED

Mechanical:

- Multiple modules can be daisy chained to add additional outputs
- Snap-in style standoffs with fast-on connect cables for easy field installation
- Fiber glass PCB and high efficiency circuit provides less heat generation leading to a longer service life and lower MTBF
- Dimensions: 6.00L" x 4.00W" x 1.50H"
- Weight: 1.00 lbs.

ORDERING

R8 8 fused outputs at 3 Amps per output. ATM Style

R8P 8 class II power limited outputs at 2.5 Amps per output

Provided with cables and mounting hardware

ELECTRICAL RATINGS

Parameter	Rating
Lock Outputs	Eight (8)
Access Control Inputs	Eight (8)
Input Voltage	12 and 24 VDC
Input Current	20 Amps
Output Voltage (Jumper Select)	12 or 24 VDC
Output Current R8	Fused at 3A per output
Output Current R8P	Class II at 2.5A per output
Relay Contact Rating	12A @ 28V
Fire Alarm Interface	Per Output
Supports follow on modules	Yes
Operating Temperature	32 to +122F (0 to +49C)
Dimensions	6.00L" x 4.00W" x 2.5D"
Weight	1 lbs.

Agency Approvals:

- UL294, UL603, UL1076
- ULC S318, S319, CSA C22.2#1071, CSA 22.2 #60950
- CSFM Approved | ROHS Leadfree | CE Approved

Vantage Series R8/R8P Relay Module

8 Outputs | FAI | Dual Buss Architecture | Bi Color Voltage LEDs | UL/CUL


R8 Module Programming

Output amodes:

- Fail-safe, fail-secure, constant on
- Fire alarm interface or over-ride
- Buss 1 or Buss 2 selection

FlexConnect® Dual Buss Architecture


Each output may be individually programmed via jumper setting



yellow jumper setting to buss 1 or buss 2 sets output condition

24V buss 1


12V buss 2

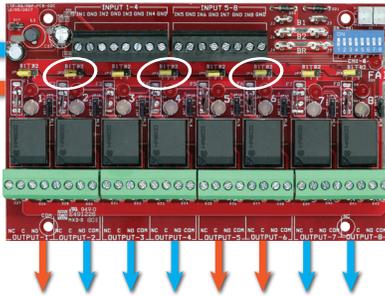

each output is programmable for 12 or 24V
in any of 3 different modes

R8 Access Power Systems

- FPV4-R8E1 | 4A, eight relay outputs
- FPV6-R8E1 | 6A, eight relay outputs
- FPV102-R8E1 | 10A/12V, eight relay outputs
- FPV104-R8E1 | 10A/24V, eight relay outputs

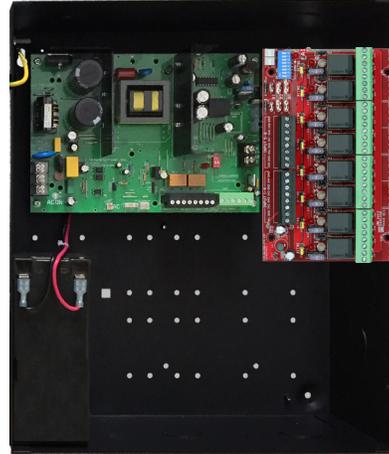

LifeSafetyPower.com

(888) 577-2898

info1@lifesafetypower.com

Specifications subject to change without notice.

© 2022 LifeSafety Power. All rights reserved. LifeSafety Power, NetLink, Vantage are trademarks of LifeSafety Power. All other trademarks and copyrights are the property of their respective owners.

P01-932A 07/22

LifeSafety Power

10027 S. 51st Street, Suite 102
Phoenix, AZ 85044 USA