



Part No.	Size	Weight
E4H	24"H x 20"W x 6.5"D	24 lbs.



Overview


HCLASS multi-purpose enclosures offer maximum flexibility, functionality and savings to access system designers. HCLASS enclosures are engineered to house FlexPower[®] power management boards alongside Honeywell Pro-Watch[®] access panels in one compact, secure system. The E4H can be configured for a maximum of six doors with dual voltage distribution.

To prevent damage to system electronics, the backplate separates from the enclosure for access hardware mounting in the shop while wiring is pulled to the enclosure at the job site. Once configured, the backplate can be remounted for final ties and checkout.

Features

- Mounts LSP power and access hardware in a variety of combinations
- Removable backplate simplifies job installation
- Pre-engineered access mounting patterns saves installation time
 - ◆ Power and distribution boards are mounted and pre-wired
 - ◆ Access boards mount on provided threaded standoffs
- Mechanical upgrades
 - ◆ Removable door with quick disconnect grounding strap
 - ◆ Lockset and tamper switch provided
 - ◆ 6.5" enclosure depth to accommodate battery area
 - ◆ 16 Gauge steel with textured black finish
 - ◆ Multiple knockouts all four sides

Custom Backplate Mounting System

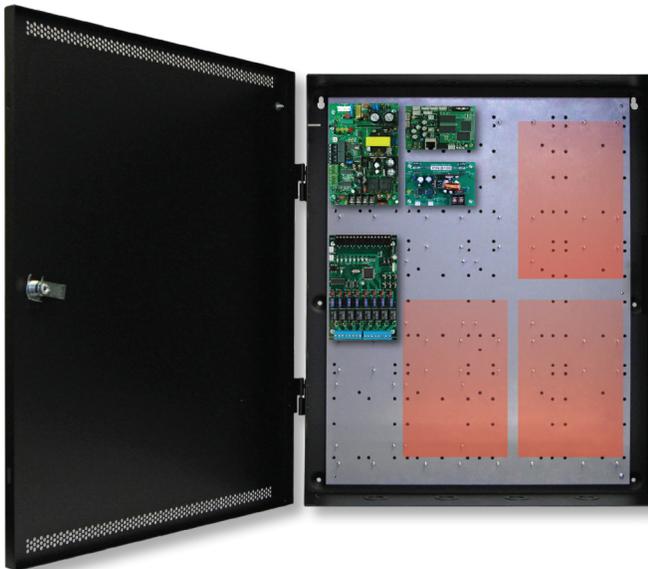

Flexible Mounting Pattern

The E4H backplate is removable and Honeywell ProWatch panels and FlexPower modules in both single and dual voltage configurations.

FlexPower power supply(s) and distribution boards mount on threaded studs. Honeywell panels mount on supplied threaded standoffs.


Battery space beneath the enclosure backplate accommodates up to four (4) 12AH batteries.

E4H Software House Mounting Guide

Pro-Watch Panel	Available Slots
Controller	3
Reader	3
I/O	3




Enclosure Features

- ◆ **Custom Backplate**
 - Light weight aluminum with AC and battery slots to protect cables
 - LSP pre-wired power modules reduce installation time
 - Front side screw in standoffs simplifies panel installation
 - Wide wire management channels for panduit or tie wrap
- ◆ **Mechanical**
 - Pre-drilled mounting holes for easy field upgrades
 - 6.5" cabinet depth accommodates large battery sets
 - Removable door with "fast disconnect" ground strap
 - Multiple knockouts all four sides

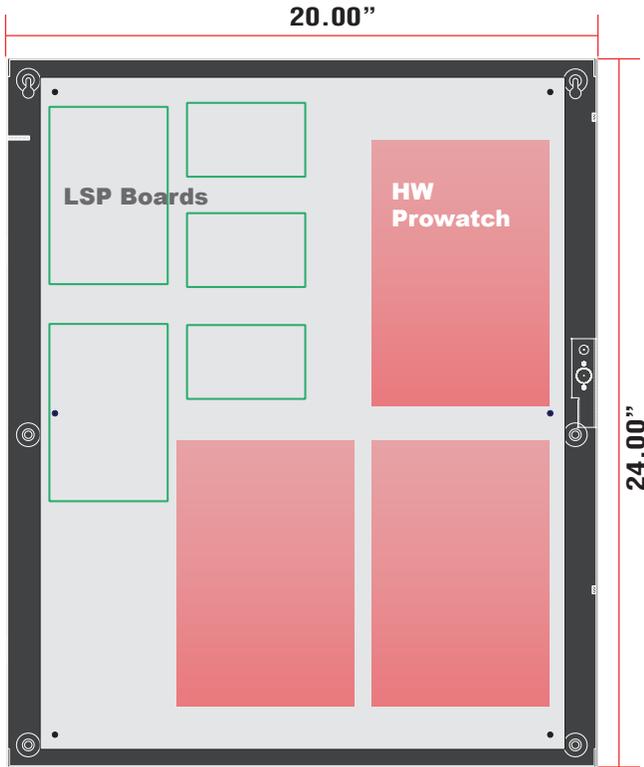

E4 Mechanical Specification

Enclosure Dimensions (H x W x D)
24.00" x 20.00" x 6.50" (61 x 51 x 16.5 cm)

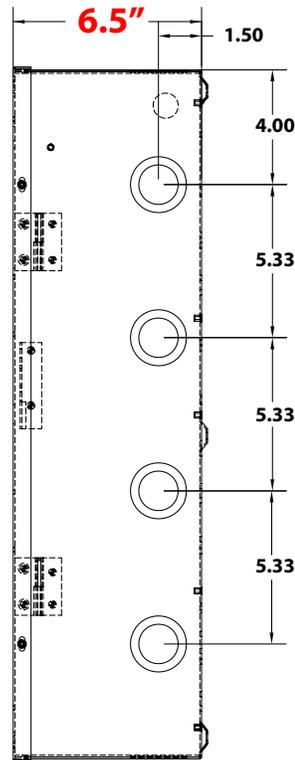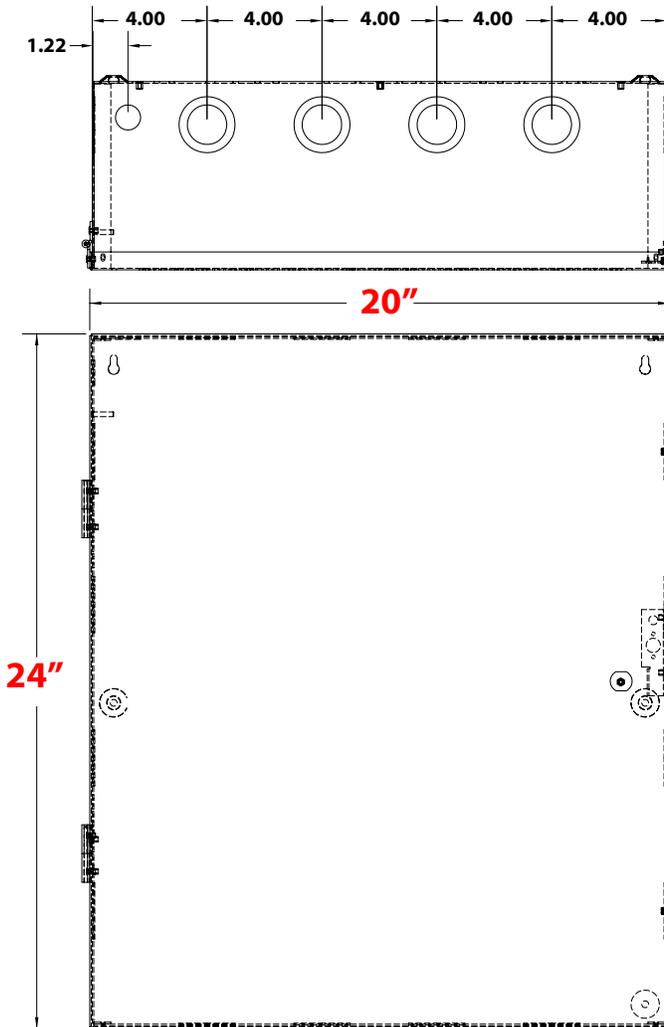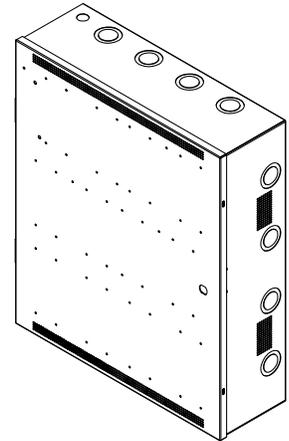

lifesafetypower.com

(888) 577-2898
info1@lifesafetypower.com

Specifications subject to change without notice.

© 2020 LifeSafety Power. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power. All other trademarks and copyrights are the property of their respective owners.
P01-766A 05/20

LifeSafety Power
899 E Park Avenue
Libertyville, IL 60048 USA